



PCR CABINET



PCR cabinet is designed for work with DNA samples in clean environment when conducting PCR diagnostics

PROTECTS OPERATING AREA FROM EXTERNAL CONTAMINATION

DISTINCTIVE FEATURES:

All-welded frame of the cabinet

PCR cabinet's tabletop is of stainless steel

PCR cabinet is painted with high-quality powder enamel of light colors, resistant to disinfectants

Pullout UV unit located under the tabletop when not used

UV irradiation time is set up with a timer that also indicates the cumulative work time of the UV unit

Front sash lifting mechanism allows fixing it in two positions which eases the process of disinfection of the chamber and of the sash itself from both sides.

Lighting unit of the PCR cabinet is located outside the work chamber

PCR cabinet has built-in sockets for connection of the laboratory devices

A cabinet is featured with a closed UV air recirculator installed over the work chamber under the top cover



BAV-PCR-"Laminar-S."

Article: 1E-F.002-10.0



Does not provide operator and environment protection





PCR CABINET



MAIN PARAMETERS AND DIMENSIONS



BAV-PCR-“Laminar-S.”

Article: 1E-F.002-10.0

Dimensions of the assembled cabinet without stand, mm (WxDxH)	1020x600x800
Dimensions of the cabinet assembled with stand*, mm (WxDxH)	1020x600x1400
Dimensions of the work chamber, mm (WxDxH)	1015x530x535
Weight of the cabinet without stand, kg, not more than	50
Input power of the cabinet, W, not more than (without the built-in sockets)	100

* the stand is not part of the standard configuration and can be supplied as an additional option

A closed UV air recirculator is installed over the work chamber under the top cover. The UV recirculator is designed for disinfection of the air inside the work chamber of the cabinet in the process of manipulations with the work agents.

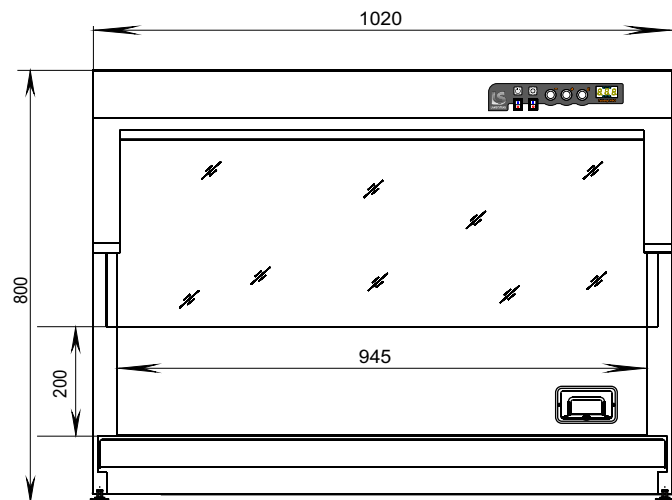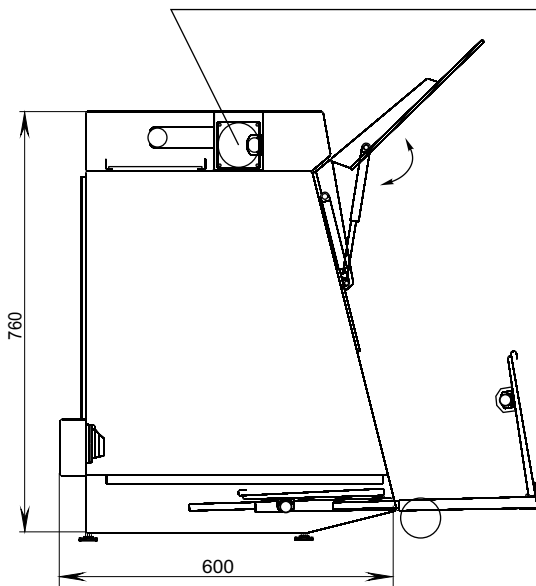

ADDITIONAL OPTIONS:

- additional set of sockets (installed on the left side)
- frame stand (packed with cabinet)/(in a separate package)

www.lamsys.com



LAMSYSTEMS CC

Turgoyak Road, 2/4
Miass, Chelyabinsk region
456300 Russia
Tel./fax: +7-3513-255-255
sale@lamsys-euro.com

Representative in EU:
LAMSYSTEMS GmbH
Campus Berlin-Buch,
Robert-Rössle-Str. 10
13125 Berlin, Germany
Tel.: +49 (0)30 9489 2080
Fax.: +49 (0)30 9489 2081
info@lamsys-euro.com

Published in 2019.

The manufacturer reserves the right to change specifications and designs in further technical development of the equipment